




Measuring



Positioning

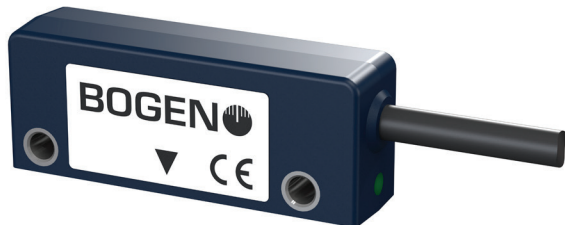

## IKS9 Incremental Magnetic Sensing Head

- Linear Applications
- Rotational Applications
- Non contact, quick position measurement

### Features

- High accuracy
- Resolution options available to 20 nm
- Single piece unit
- Programmable resolutions
- Customizable max output frequencies
- Software programmable interface
- Connector options with multiple cable lengths
- No wear from usage
- Resistant to dust, cooling lubricant emulsion, oil, etc.
- High fly height tolerance
- Unlimited measuring length

### Measuring movements with the IKS9 – more power in less space

The incremental magnetic sensing head IKS9 for linear and rotary applications:

The IKS9 impresses customers in automation, instrumentation and motion control applications with an extremely high accuracy and a particularly high degree of modularity. BOGEN offers more than 1 million different variants of IKS9 that can be configured to customer-specific requirements. In combination with an individual scale, measurement solutions for almost every application can be custom-tailored.

Features

Resolution	0.020 to 1250 $\mu\text{m}$ , depending on the pole pitch
Max. Movement Speed	up to 100 m/s, depending on the pole pitch, resolution and Max Output Freq. (Table 1) (maximum movement speed of P 0.5 is 25 m/s; P 1 is 50 m/s; P 2 is 100 m/s; P 2.54 is 125 m/s and P5 250 m/s)
Energy Consumption (without Load)	<65 mA (UB = 5 V)
Operating Temperature	-20 to +70 $^{\circ}\text{C}$
Storage Temperature	-20 to +80 $^{\circ}\text{C}$
Protection Class	IP67
LED <sup>(1)</sup>	green LED = magnetic field status indication red LED = Error status indication
Adjustable Parameters	Resolution, maximum output frequency and interface (with optional programming device and the appropriate software)
Weight	Weight IKS9 (Plastic case) ~60g (L2 T1 C4 Standard quality cabel with length 2 m; Connector D-SUB 15) Weight IKS9.1 (Metal case) ~75g (L2 T1 C4 Standard quality cabel with length 2 m; Connector D-SUB 15)

Resolution and Speed

Default Values at Output Frequency F = 1000 kHz

Pole Pitch P [mm]	Resolution R [ $\mu\text{m}$ ]	Speed [m/s]
0.5	0.25	1
1	0.5	2
2	1	4
2.54	1.27	5.08
5	2.5	10


Sensing Head Variants

Pole pitch	0.5 mm; 1 mm; 2 mm; 2.54mm; 5 mm
Reference	Reference chip for 2nd track not for 0.5 mm or periodically from the pole pitch
Supply Voltage	5 V $\pm$ 5 % or 7 - 32 V
Interface (without load)	D1 = RS422 (0 to 5 V) D2 = Push-Pull HTL (0 to Supply Voltage) D3 = Push-Pull TTL (0 to 5 V)
Cable Length of Sensing Head	Standard 2 m, optional variable length from 10 cm up to 6 m
Connector	plug according to order code, other options on request




<sup>(1)</sup>For additional information please see LED Mode on Page 6

Output Circuit

RS422

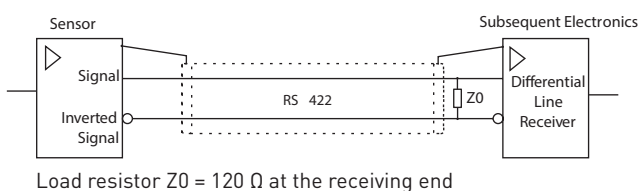

Push-Pull (HTL, TTL)

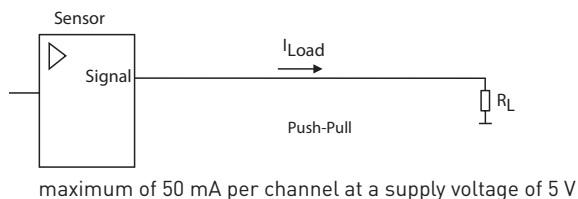

Output Signals

Signals	A, /A, B, /B, Z, /Z
Signal Error Indicator	High impedance on all output signals [A, /A, B, /B, Z, /Z]

- (1) Phase shift A and B 90°  $\pm$ 10° electrical
- (2) Signal period depending on the reference track pattern or as a periodic reference depending on the pole pitch
- Z Length default is 50 counts

Further Selection (Ordering Parameters)

Pole Pitch P [mm]					Resolution R [µm]	Resolution R [dpi]	Maximum Output Frequency peer channel F [kHz]					
0.5	1	2	2.54	5			3500	1750	1000	500	100	60
(0.1 inch)							<b>Max. Movement Speed [m/s]</b>					
				x	1250	20.32	>100	>100	>100	>100	>100	>100
		x		x	500	50.8	>100	>100	>100	>100	>100	>100
	x	x		x	200	127	>100	>100	>100	>100	80	48
x	x	x		x	100	254	>100	>100	>100	>100	40	24
		x			80	317.5	>100	>100	>100	>100	32	19.2
x	x	x		x	62.5	406.4	>100	>100	>100	>100	25	15
x	x	x		x	50	508	>100	>100	>100	>100	20	12
	x	x		x	40	635	>100	>100	>100	80	16	9.6
x	x	x		x	25	1016	>100	>100	>100	50	10	6
x	x	x	x	x	20	1270	>100	>100	80	40	8	4.8
x	x	x		x	12.5	2032	>100	87.5	50	25	5	3
x	x	x	x	x	10	2540	>100	70	40	20	4	2.4
x	x	x	x	x	5	5080	70	35	20	10	2	1.2
x	x	x	x	x	4	6350	56	28	16	8	1.6	0.96
x	x	x	x	x	2.5	10160	35	17.5	10	5	1	0.6
x	x	x	x	x	2	12700	28	14	8	4	0.8	0.48
x	x	x	x	x	1	25400	14	7	4	2	0.4	0.24
x	x	x	x	x	0.5	50800	7	3.5	2	1	0.2	0.12
x	x	x	x	x	0.25	101600	3.5	1.75	1	0.5	0.1	0.06
x	x	x	x	x	0.125	203200	1.75	0.875	0.5	0.25	0.05	0.03
x	x	x	x		0.05	508000	0.7	0.35	0.2	0.1	0.02	0.012
x	x				0.02	1270000	0.28	0.14	0.08	0.04	0.008	0.0048

**Table 1: Maximum output frequency and speed as a function of pole pitch and resolution**

Definition:

Resolution *R* (Resolution is after four-edge analyses)

Polepitch *P* (available 0.5; 1; 2; 2.54 and 5 mm)

Resolution-Factor *Rf* (Resolution-Factor available from 4 to 65536 in steps of one)

Maximum Output Frequency peer channel *F* (Max-Movement-Speed available from 60 kHz to 3500 kHz)

Max-Movement-Speed *Vmax*

Interpolation =  $Rf / 4$

$$R = P / Rf$$

Resolution [dpi] *Rdpi*

$$Rdpi = 25400 / R$$

*Vmax* is limited by following formulars:

1.  $Vmax = 4 * F * R$
2.  $Vmax = P * 50 \text{ MHz}$

LED Error Codes (Order Parameter E1)

The amount of flashing signs of the red LED indicates the fault. It starts after a fast pulsed light.




The example displays a weak and fluctuating magnetic field (fault 2 and 3).


LED flashing signs amount	Description
1	Magnetic field is too high
2	Magnetic field is too low
3	The range of the magnetic fluctuation is too large
4	Output frequency is too high
5	Movement speed is too high
6	Movement speed is much too high (Critical)
7, 8	Movement speed too high for internal signal processing with current programming
9, 10, 11	Internal Error 9, 10, 11

IKS9 - Rev2.1 [02/16/2016]

Dimensions

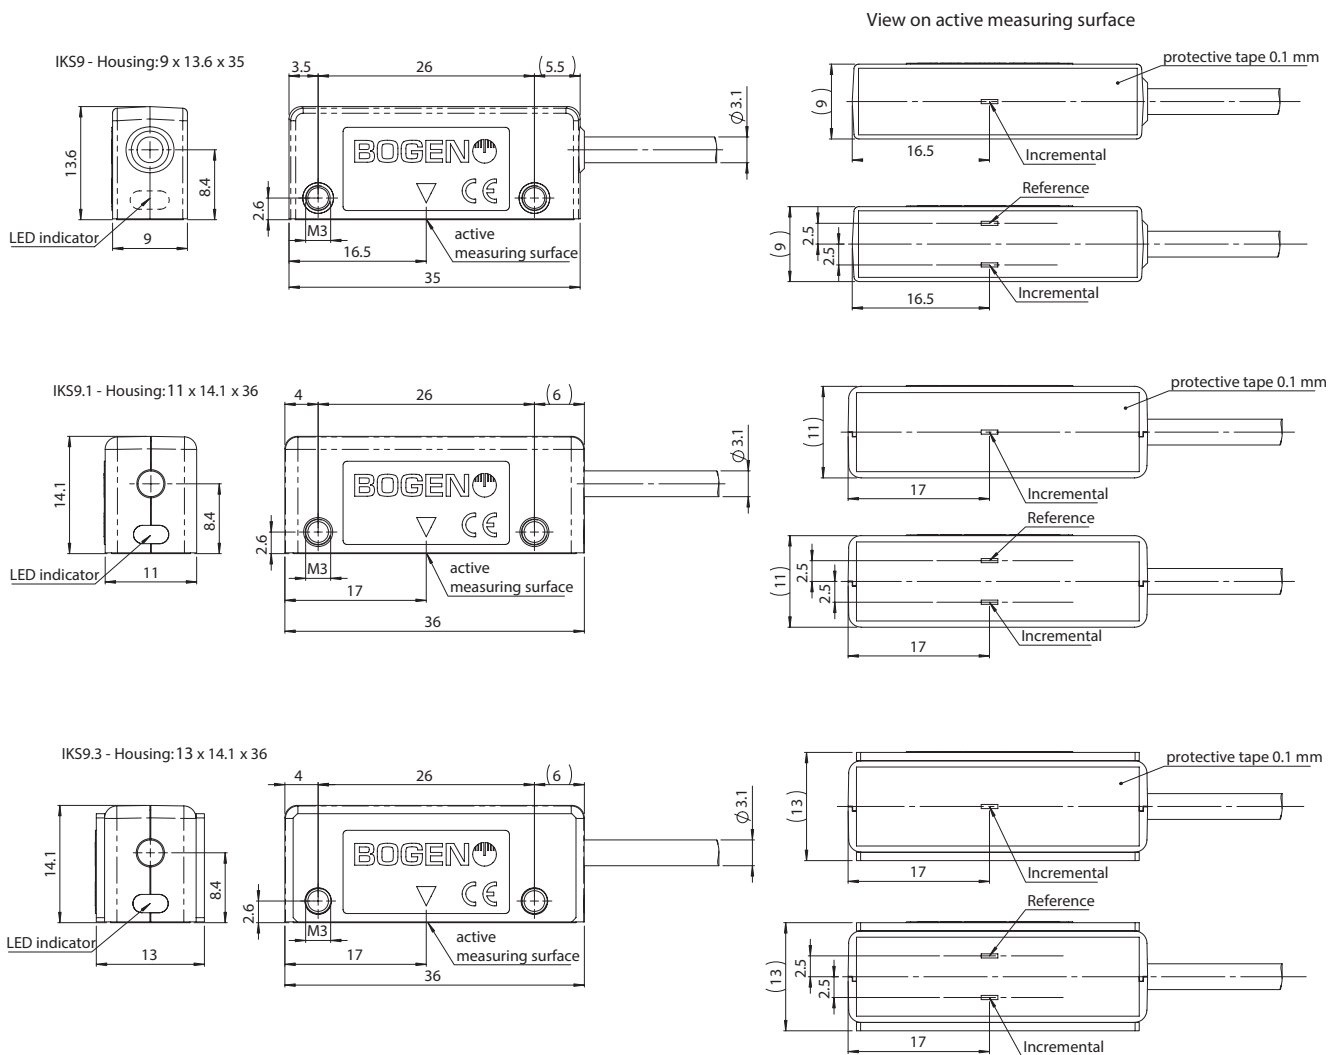

Installation Tolerances

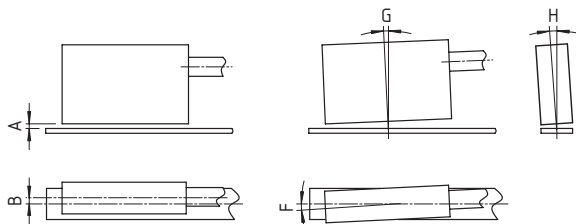

	Pole Pitch 0.5 mm	Pole Pitch 1 mm	Pole Pitch 2 mm	Pole Pitch 2.54 mm	Pole Pitch 5 mm
A [mm]	0.1 to 0.25	0.1 to 0.5	0.1 to 1.0	0.1 to 1.25	0.1 to 2.5
B <sup>(3)</sup> [mm]	2.5	2.5	2.5	2.5	2.5
B <sup>(4)</sup> [mm]	0.5	0.5	0.5	0.5	0.5
G	0.5°	1°	1°	1°	1°
H	3°	3°	3°	3°	3°
F	3°	3°	3°	3°	3°


<sup>(3)</sup> relative to 10 mm scale width (1-track)

<sup>(4)</sup> relative to 10 mm scale width (2-track)

Pin Assignment

Signal	Color	Pin No.				
		C2 (M12 plug male)	C3 (D-SUB 9 male)	C4 (D-SUB 15 male)	C5 (D-SUB 25 female)	C6 (D-SUB 15 HD male)
V -	blue	1	9	2	2 + 16 <sup>[5]</sup>	2
V +	red	2	5	7	1 + 14 <sup>[5]</sup>	7
A	brown	3	4	14	3	14
/A	green	4	8	6	4	6
B	grey	5	3	13	6	13
/B	yellow	6	7	5	7	5
Z	pink	7	2	12	17	12
/Z	white	8	6	4	18	4
Shield	-	1	Case	Case	Case	Case + 15

<sup>[5]</sup> PIN 1 with Pin 14 and Pin 2 with Pin 16 connected through solder bridge

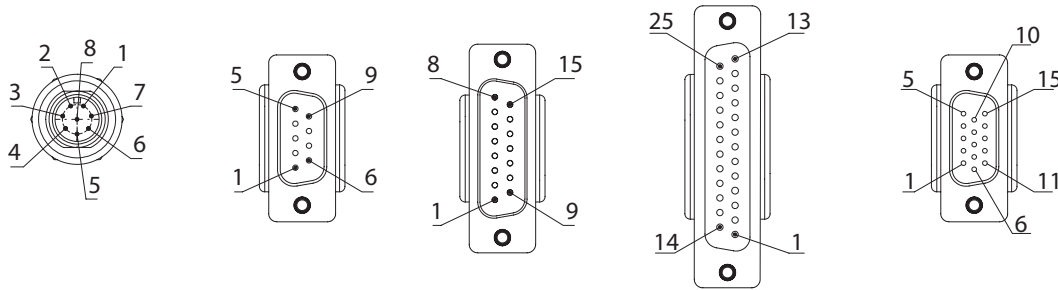

C2: M12 plug, (male)    C3: D-SUB 9 (male)    C4: D-SUB 15 (male)    C5: D-SUB 25 (female)    C6: D-SUB 15 HD (male)

Optional Accessory – Order Codes for Linear Scales, 10 mm Width <sup>[6]</sup>

Pole Pitch	Accuracy A3	Accuracy A10	Accuracy A20	Accuracy A40 (standard)
0.5	KBEE10-0.5-A3K	KBEE10-0.5-A10K	KBEE10-0.5-A20K	KBEE10-0.5-K
1	KBEE10-1-A3K	KBEE10-1-A10K	KBEE10-1-A20K	KBEE10-1-K
2	KBEE10-2-A3K	KBEE10-2-A10K	KBEE10-2-A20K	KBEE10-2-K
2.54	KBEE10-2.54-A3K	KBEE10-2.54-A10K	KBEE10-2.54-A20K	KBEE10-2.54-K
5	KBEE10-5-A3K	KBEE10-5-A10K	KBEE10-5-A20K	KBEE10-5-K

<sup>[6]</sup> Scale dimensions: 10 mm x 1.3 mm (w/o cover tape), length up to 50 m. Other accuracies, other pole pitches, other scale widths and scales with reference track on request. See separate data sheet for linear scales for further possibilities.

Optional Accessory –Rotary Scales

Rotary scales with different dimensions and number of poles are available. Please contact us.

Order Code

## Parameters

IKS9 

W
---

 - 

Z	P	V	D	L	R	F	T	C	E
---	---	---	---	---	---	---	---	---	---

		Code <sup>(7)</sup>	Explanation <sup>(7)</sup>
<b>W</b>	<b>Width [mm]</b>		9 mm (Plastic case)
		.1	11 mm (Metal case)
		.3	13 mm (Metal case)
<b>Z</b>	<b>Reference Signal <sup>(8,9)</sup></b>	<b>Z1.50</b>	<b>Periodic index signal, from the pole pitch with length of index signal 50 counts</b>
		Z1. ...	Periodic index signal, from the pole pitch, length of index signal x counts <sup>(10)</sup>
		Z2. ...	From reference marks (requires 2-track magnetic tape with incremental track and reference track), length of index signal ... counts <sup>(10)</sup>
<b>P</b>	<b>Pole Pitch [mm]</b>	P0.5	0.5 mm
		P1	1 mm
		<b>P2</b>	<b>2 mm</b>
		P2.54	2.54 mm
		P5	5 mm
<b>V</b>	<b>Supply Voltage [V]</b>	<b>V5</b>	<b>5 V</b>
		V7	7...32 V (on request only)
<b>D</b>	<b>Interface <sup>(8)</sup></b>	<b>D1</b>	<b>RS422</b>
		D2	Push-Pull HTL
		D3	Push-Pull TTL
<b>L</b>	<b>Cable Length [m]</b>	L1	1 m
		<b>L2</b>	<b>2 m</b>
		L3	3 m
		L ...	... m
		L6	6 m
<b>R</b>	<b>Resolution <sup>(8)</sup> [µm]</b>	R0.25	Standard for pole pitch 0.5 mm
		R0.5	Standard for pole pitch 1 mm
		<b>R1</b>	<b>Standard for pole pitch 2 mm</b>
		R2.5	Standard for pole pitch 5 mm
		R ...	Other non-standard resolutions, see section "Resolution and Speed" in table 1 on page 2.
<b>F</b>	<b>Maximum Output Frequency per channel <sup>(8)</sup> [kHz]</b>	<b>F1000</b>	<b>1000 kHz</b>
		F ...	Other non-standard output frequencies, see section "Resolution and Speed" in table 1 on page 2.
<b>T</b>	<b>Cable Type</b>	<b>T1</b>	<b>Standard quality (3.1 mm diameter)</b>
		T2	Drag chain quality (on request only)
<b>C</b>	<b>Connector (others on request)</b>	C2	M12 plug (male) (on request only)
		C3	D-SUB 9 (male)
		<b>C4</b>	<b>D-SUB 15 (male)</b>
		C5	D-SUB 25 (female)
		C6	D-SUB 15 HD (male)
		C99	Customer specific connector.
<b>E</b>	<b>LED Mode <sup>(8)</sup></b>	E0	LED Green: Low -> sufficient magnetic field Bright -> best performance
			LED RED: Error signalization with LED on
E1	LED Green: Low -> sufficient magnetic field Bright -> best performance	LED RED: Error signalization with blinking codes, see on page 3	

<sup>(7)</sup> standard parameters are bold<sup>(8)</sup> user programmable parameters (optional IKS-Programming device necessary)<sup>(9)</sup> if no index signal is needed, please do not connect pin "Z" an "/Z" on delivered connector<sup>(10)</sup> length of index signal available from 1 to 256

## Ordering Example

IKS9-Z1.50P2V5D1L2R1F1000T1C4E1

IKS9 Magnetic Sensing Head, width 9 mm, with periodic index signal, index length 50 counts, 2 mm pole pitch, voltage 5 V, interface RS422, cable length 2 m, 1  $\mu$ m resolution, max. output frequency 1000 kHz, standard cable, D-SUB 15 (male) connector, error signalization with blinking error codes

IKS9.1-Z2.1P5V7D3L5.5R125F100T1C5E0

IKS9 Magnetic Sensing Head, width 11 mm, with reference signal from reference marks (2-track magnetic tape), index length 1 count, 5 mm pole pitch, voltage 7-32 V (broad-range), interface Push-Pull TTL, cable length 5.5 m, 125  $\mu$ m resolution, max. output frequency 100 kHz, standard cable, D-SUB 25 (female) connector, error signalization with LED RED on

BOGEN can provide customised resolutions and cables. Here is an ordering example for a customized order code:

IKS9.1-Z2.50P2V5D1L0.3R0.244140625F3500T1C4E1

IKS9 Magnetic Sensing Head, width 11 mm, with reference signal from reference marks (2-track magnetic tape), index length 1 count, 2 mm pole pitch, voltage 5 V, interface RS422, cable length 0.3 m, 0.244140625  $\mu$ m resolution, max. output frequency 3500 kHz, standard cable, D-SUB 15 (male) connector, error signalization with blinking error codes

IKS9.3-Z1.50P2V5D1L0.6R15.625F2333T1C6E1

IKS9 Magnetic Sensing Head, width 13 mm, with periodic index signal, index length 1 count, 2 mm pole pitch, voltage 5 V, interface RS422, cable length 0.6 m, 15.625  $\mu$ m resolution, max. output frequency 2333 kHz, standard cable, D-SUB 15 HD (male) connector, error signalization with blinking error codes