

The **STD-37** is a contact-less optical reflective absolute position sensor. It has Integrated dual sensing heads and advanced processing, which gives it a very high precision over a low profile and redundant core.

The **STD-37** support SSI & BiSS-C interfaces.

The wide assembly tolerance of the **STD-37** makes it easy to install and align, its plug and-play approach makes it simple to design into any application.

High precision single turn, optical reflective absolute position sensor

- Contact less
- Dual core, redundant - Duplus core technology
- Low profile
- High resolution
- High accuracy

Dimensions		
OD stator	mm	37
ID rotor	mm	10
Height	mm	8






Environment Condition's	
Temperature, operational	-40 to 105 C°
Humidity	95% relative humidity, Non condensing, IEC 60068-2-78
IP rating	IP 40 , (enclosed)
Shock	400 m/s ² , 6 ms, ½ sine, 3 axes
Vibration	100 m/s ² max @ 55 Hz to 2000 Hz, 3 axes
EMC compliance	IEC 61326-1

STD-37

Absolute Position Sensor



Characteristic's		
Resolution	bit	18 - 22
Accuracy [INL]	mdeg	± 4
Repeatability	count	± 1
Data latency	µsec	20
Startup time	msec	20
Current consumption	mA	150
Power supply	VDC	5 ± 5%
Rotation speed, max	RPM	5,000
Rotor moment of inertia	kgm ²	4.5 x 10 ⁻⁷
Permissible radial run-out	mm	± 0.4
Rotor / Stator air gap	mm	1.75 ± 0.5
Weight	gr	20

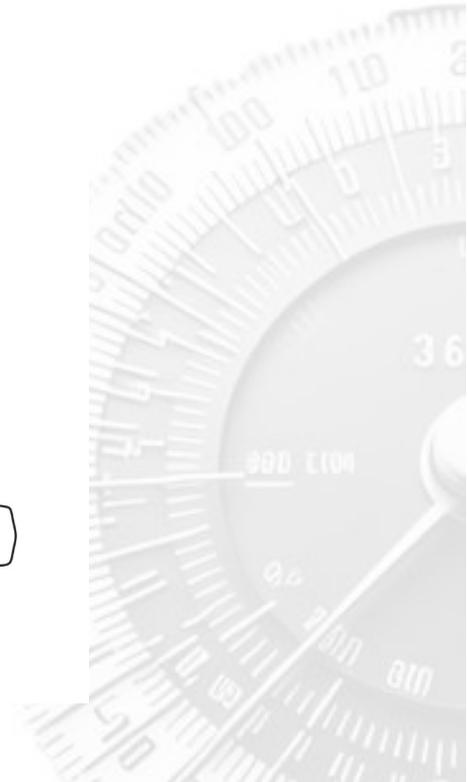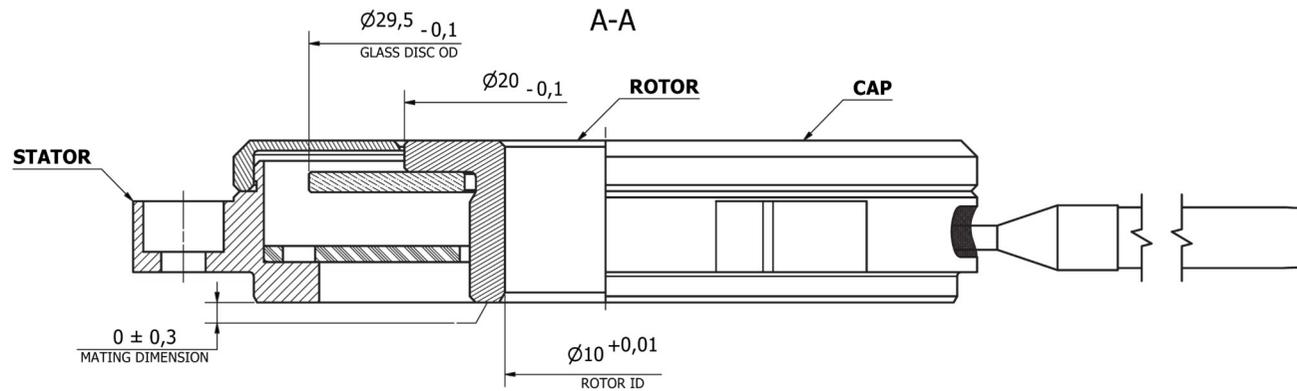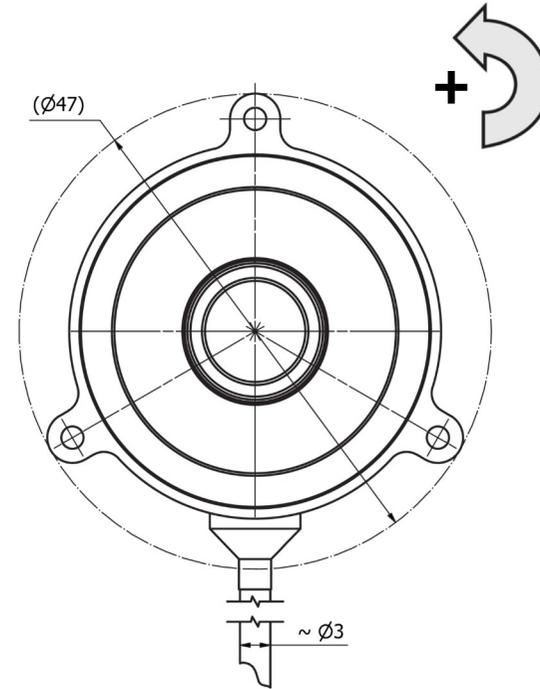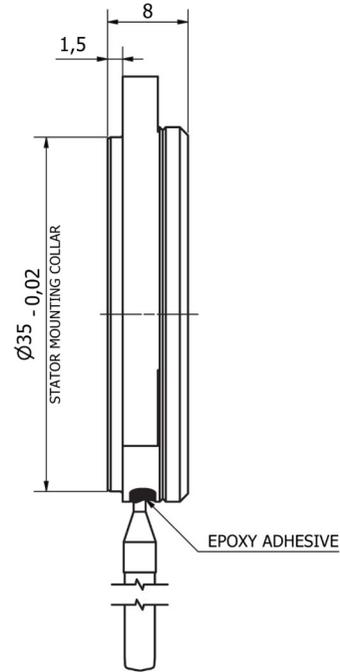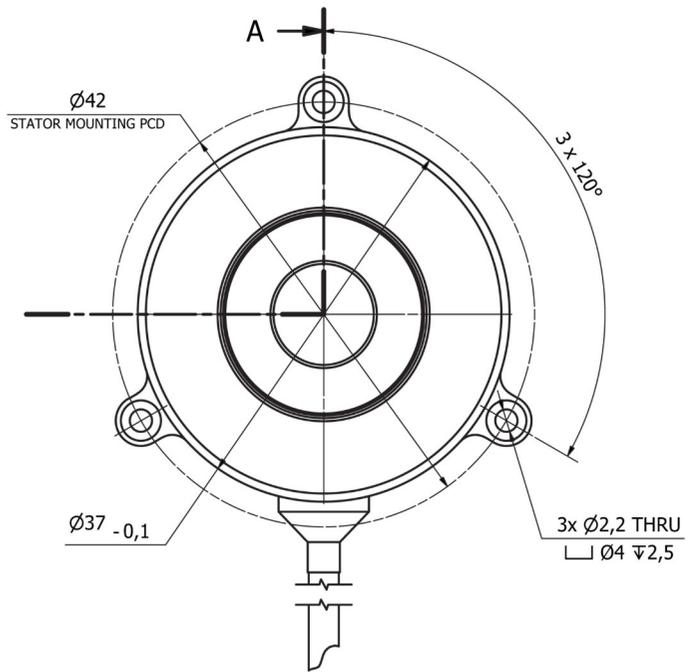

Mounting

(1) Stator

Place the encoder's Stator in the application's $\varnothing 35$ mm centering hole. Align the three mounting holes on the Stator house (spaced 120° apart) with the threaded holes (M2 x 0.4) on the application support. Align and fasten them with three screws (DIN 912 - M2 x 5). Apply a recommended tightening torque of $M_d = 0.3$ Nm.


(2) Rotor

Ensure the disc of the Rotor (Disc/Hub assembly) is clean and free of damage.

Press the Rotor onto the application shaft axially, the $\varnothing 10$ mm inner diameter of the Hub for centering.

Secure the Rotor with a screw and a washer. Apply a recommended tightening torque of $M_d = 1$ Nm.


NOTE: in dynamic applications where high accelerations and mechanical vibrations are present, the use of thread locking adhesive is recommended. (e.g. Loctite 242)

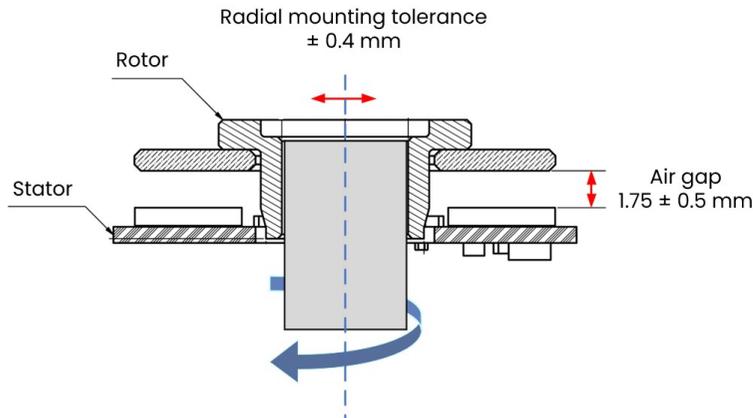


statum motion sensors on-axis calibration is used for high-precision fine-tuning, but it is not necessary in most cases.

Off-axis calibration is performed on all sensors during production as part of final quality assurance and testing to determine their general performance and characteristics. On-site setup is available for many parameters, such as rotation direction, "zero setup" and more with statum studio SW tool.



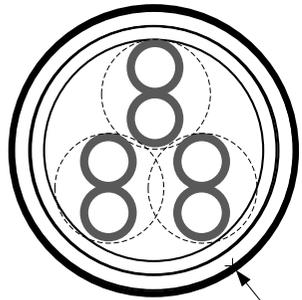

Ø 3.2 mm max

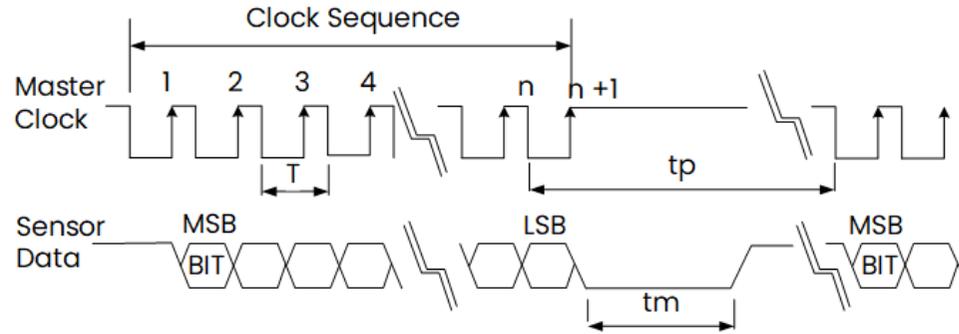


	Description	Recommended
f	Clock frequency (max)	2 MHz
t_p	Pause time	> 21 μ sec
t_m	transfer time (monoflop time)	= 20 μ sec
BIT	Build In Test (MSB , Optional)	



Cable	Twisted pair , Ø3.2 ± 0.15 mm
Wire	AWG 30 21/0.05 mm tinned copper Insulation - PFE Ø 0.6 ± 0.07 mm
Shield	Thinned copper braided 85%
Binder	FEB black
T. Rating	-40 / + 150 ° C

DB9	Function	Color	
6	Return	Black	
4	5 VDC	RED	
7	Data +	Green	
8	Data -	Yellow	
2	Clock +	Gray	
3	Clock -	Blue	
	Shield		

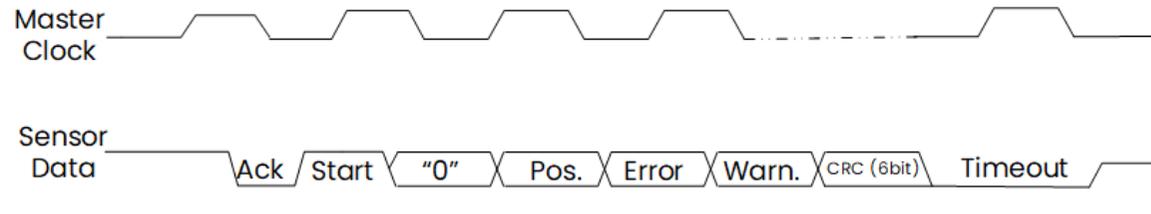

	Description	Recommended
f	Clock frequency (max)	2 MHz
Error	Error bit – active low	1
Warn.	Warning bit – active low	1
CRC	CRC polynomial inverted	6



Sensor manufactured by statum motion are warranted to be free from defects in materials and workmanship for a period of 12 months from the date of shipment.

Warranty Coverage

This warranty covers the replacement or repair of faulty encoders at no charge, provided that the following conditions are met:

- The sensor was installed, operated, and stored in accordance with the manufacturer's instructions.
- The sensor was not subjected to improper installation, misuse, or abuse.
- The sensor was not disassembled or repaired by the customer.

Product specifications are subject to change without prior notice.

The product images shown are for illustration purposes only and may not be an exact representation of the product

Ordering

STD37	a	b	c	d	e	f
--------------	---	---	---	---	---	---

a	b	c	d	e	f
Resolution	Comm.	Cable	Length	Board	Custom
18-22	B – Biss C S – SSi	1 – Flying leads 2 – DB9 connector	1 – 250 mm 2 – 500 mm	1 – Standard 2 – Conformal coating	

Stator board protection	
PCB assemble	IPC 610 Class 3
PCB	IPC 620 Class 3
Sensor harness assembly	IPC-A 620 Class 3
Conformal coating (optional)	UVCL ; UV cure conformal coating



statum motion LTD
 5 Irus st', Afula Israel
 +972 4 605 7195
info@statum-motion.com